





# Specification of Thermoelectric Module



TEC2-127-127-06

## Performance Curves at $T_h=27^\circ\text{C}$



## Performance Curves at $T_h=50^\circ\text{C}$

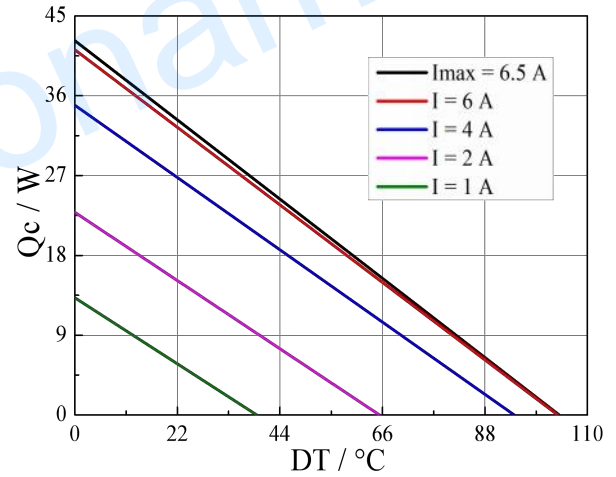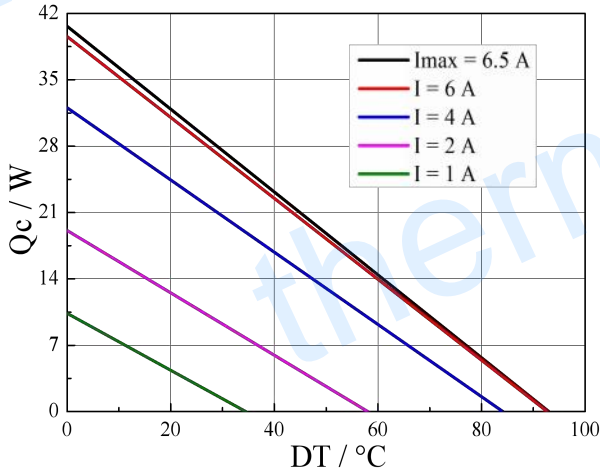

Standard Performance Graph  $Q_c = f(DT)$

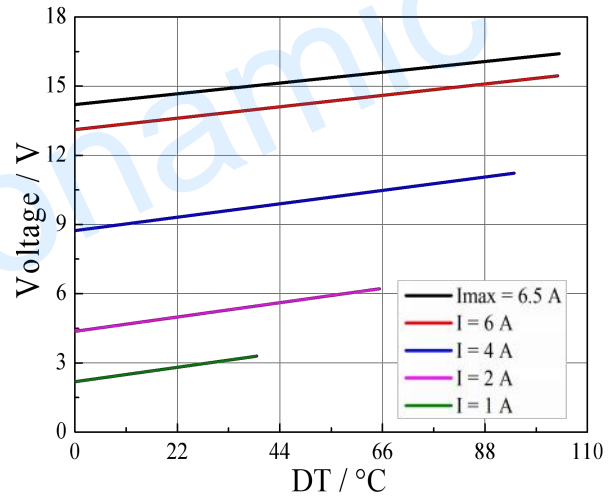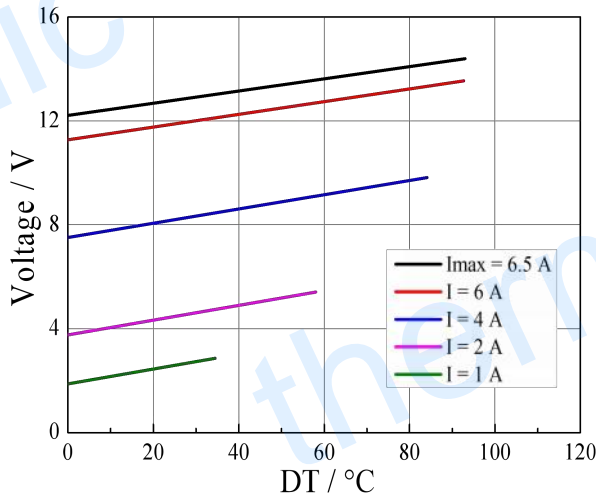

Standard Performance Graph  $V = f(DT)$

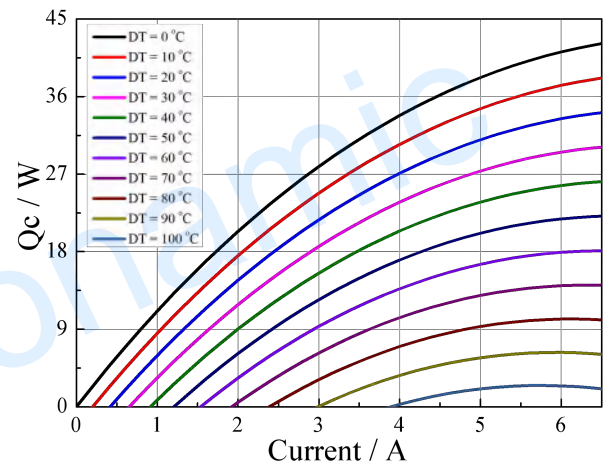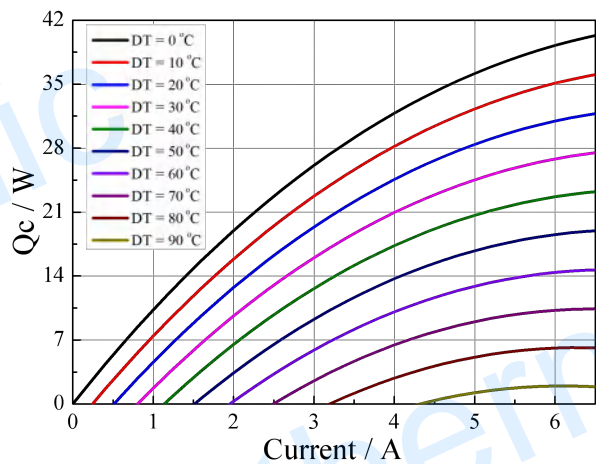


Standard Performance Graph  $Q_c = f(I)$


## Specification of Thermoelectric Module

TEC2-127-127-06



### Performance Curves at Th=27 °C

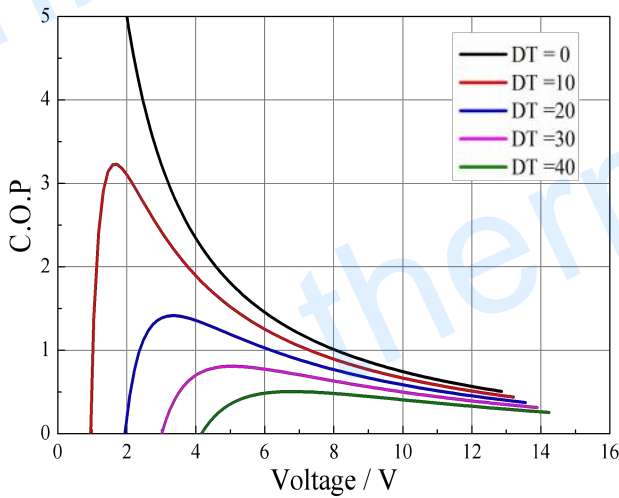

### Performance Curves at Th=50 °C

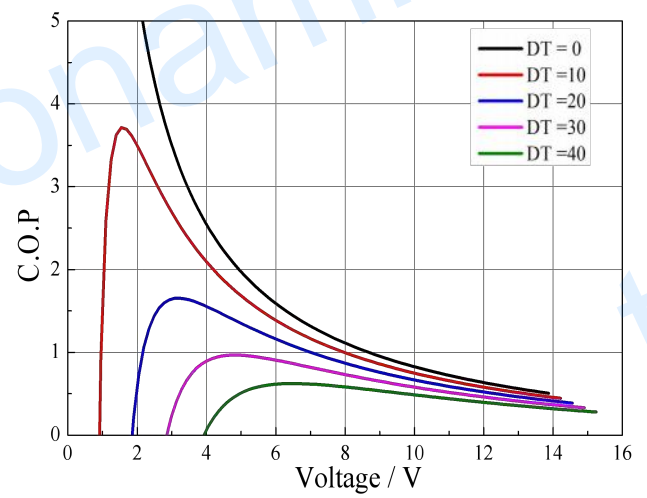

Standard Performance Graph COP = f(V) of DT ranged from 0 to 40 °C

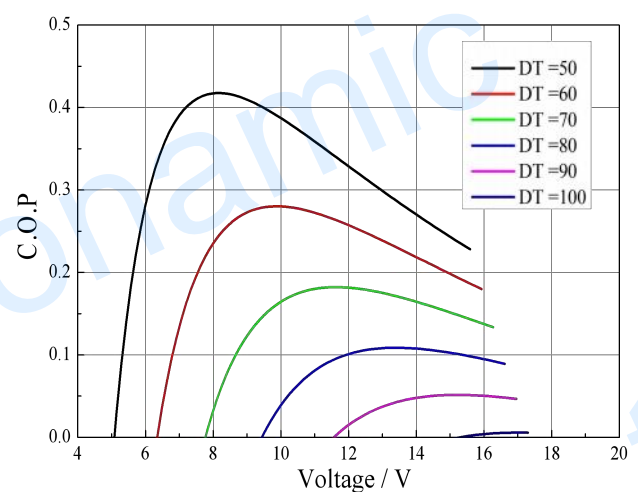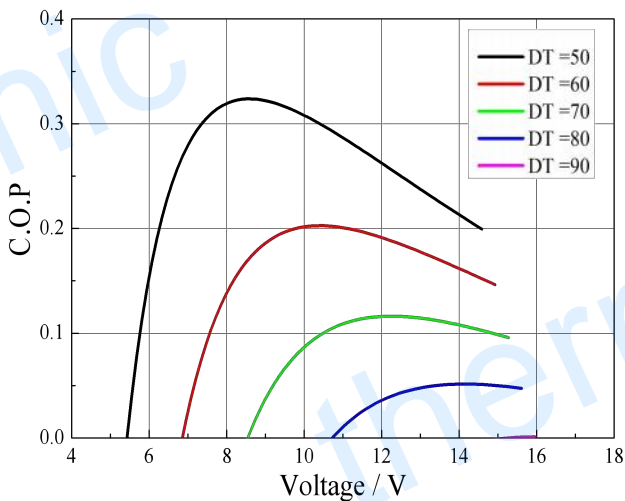

Standard Performance Graph COP = f(V) of DT ranged from 50 to 90/100 °C

**Remark:** The coefficient of performance (COP) is the cooling power  $Q_c$ /Input power ( $V \times I$ ).

### Operation Cautions

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Storage module below 100 °C
- Operation below  $I_{max}$  or  $V_{max}$
- Work under DC