

Specification of Thermoelectric Module

TEFC1-01915P-TTAu-T240-TF00-AIN

Description

The 19 couples, 8.0/9.0 mm × 3.27mm size module which is made of selected high performance ingot to achieve superior cooling performance and greater delta T up to 70 °C, designed for superior cooling and heating up to 200 °C applications. If higher operation or processing temperature is required, please specify, we can design and manufacture the custom made module according to your special requirements.

Features

- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly
- RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Liquid cooling
- Temperature stabilizer
- CPU cooler and scientific instrument
- Photonic and medical systems

Performance Specification Sheet

Th (°C)	27	50	Hot side temperature at environment: dry air, N ₂
DT _{max} (°C)	70	79	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U _{max} (Voltage)	2.36	2.55	Voltage applied to the module at DT _{max}
I _{max} (Amps)	1.5	1.5	DC current through the modules at DT _{max}
Q _{Cmax} (Watts)	2.28	2.45	Cooling capacity at cold side of the module under DT=0 °C
AC resistance (Ohms)	1.25	1.34	The module resistance is tested under AC
Tolerance (%)	10%		For thermal and electricity parameters

Geometric Characteristics Dimensions in millimeters

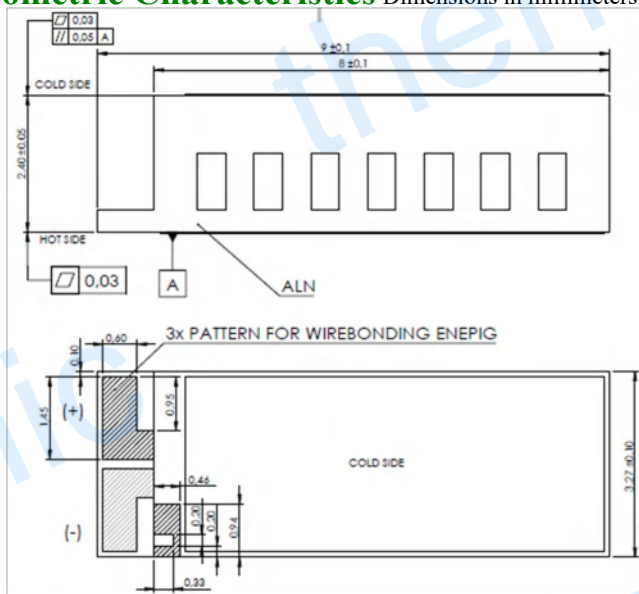

Manufacturing Options

A. Solder:

T240: SbSn (T_{melt}=240°C)

B. Sealant:

NS: No sealing

C. Ceramics:

Aluminum Nitride (AlN)

D. Ceramics Surface Options:

Hot side: Metalized (Au plating)

Cold side: Metalized (Au plating)

Ordering Option

Suffix	Thickness H (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0:2.4± 0.05	0: 0.03/0.05	No Wires


Creative technology with fine manufacturing processes provides you the reliable and quality products

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: sales@thermonamic.com.cn Web Site: www.thermonamic.com.cn


Specification of Thermoelectric Module

TEFC1-01915P-TTAu-T240-TF00-AIN



Performance Curves at $T_h=27^\circ\text{C}$

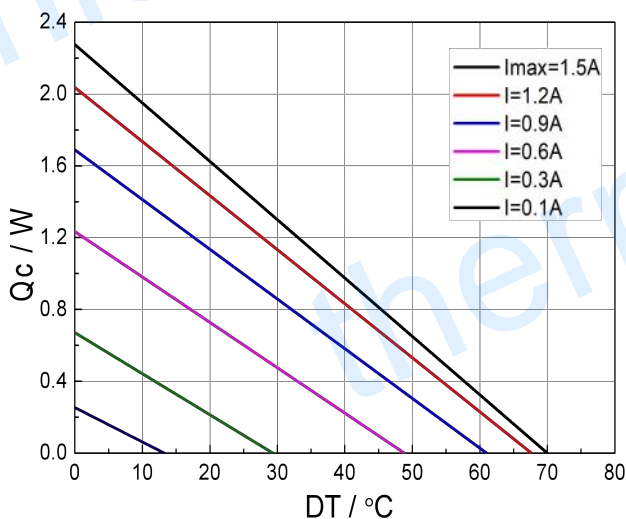



Performance Curves at $T_h=50^\circ\text{C}$

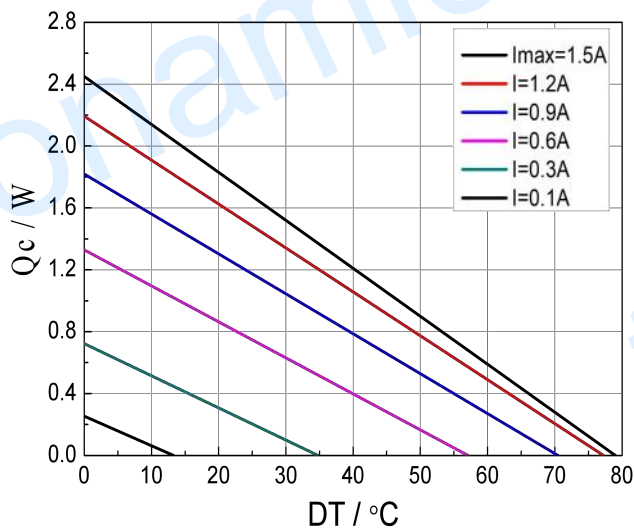

Standard Performance Graph $Q_c = f(DT)$

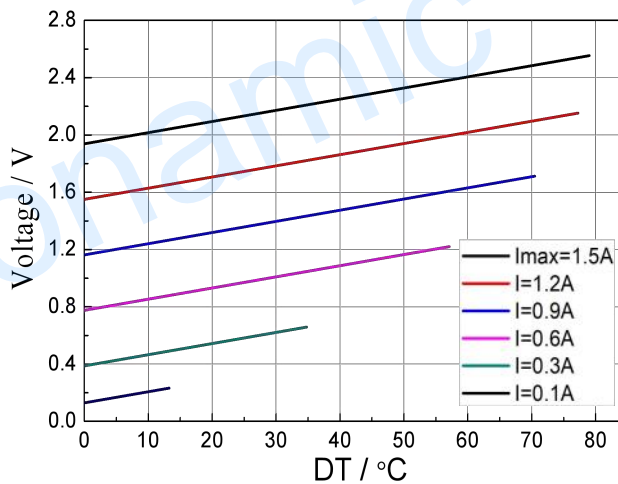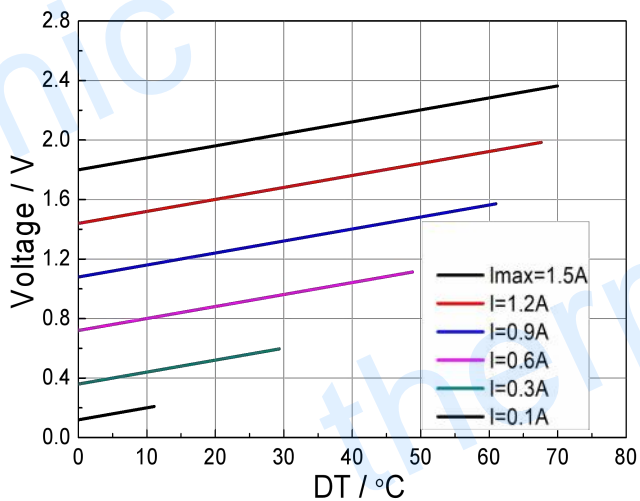

Standard Performance Graph $V = f(DT)$

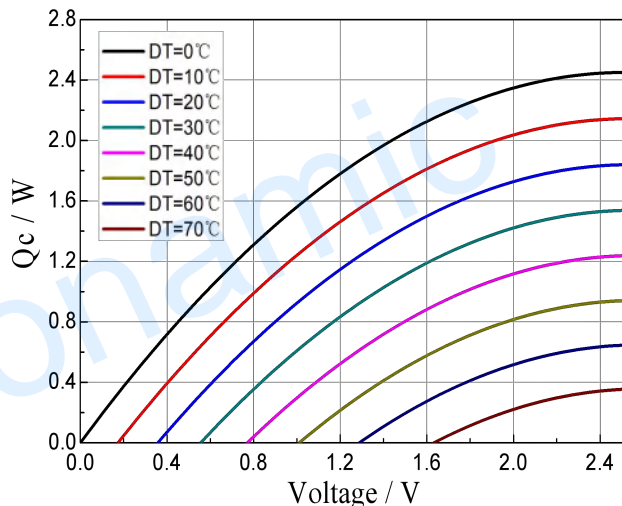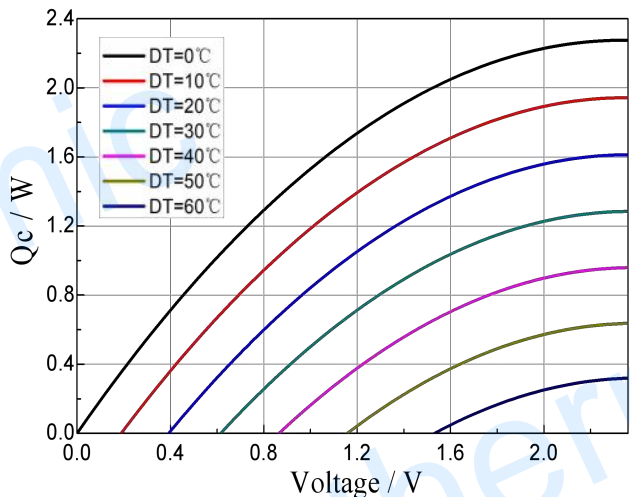


Standard Performance Graph $Q_c = f(V)$


Specification of Thermoelectric Module

TEFC1-01915P-TTAu-T240-TF00-AIN



Performance Curves at Th=27 °C

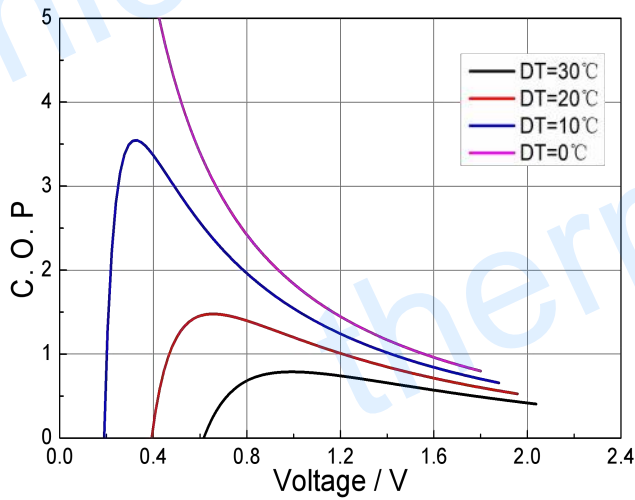

Performance Curves at Th=50 °C

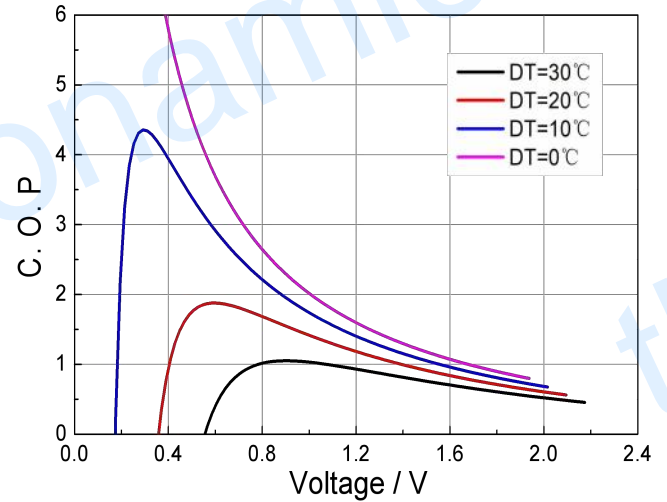

Standard Performance Graph COP = f(V) of DT ranged from 0 to 30 °C

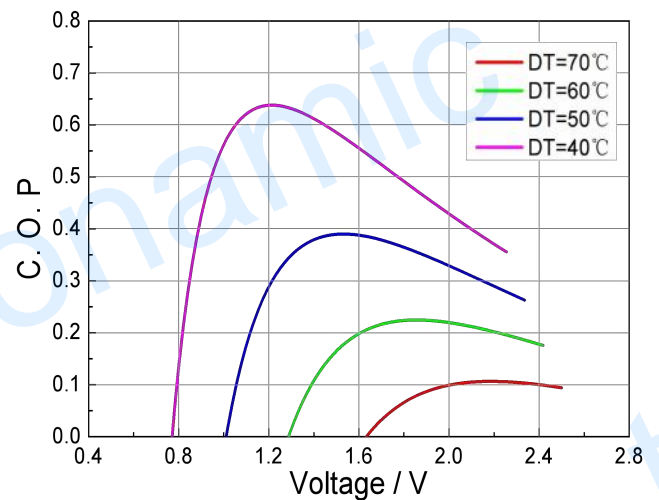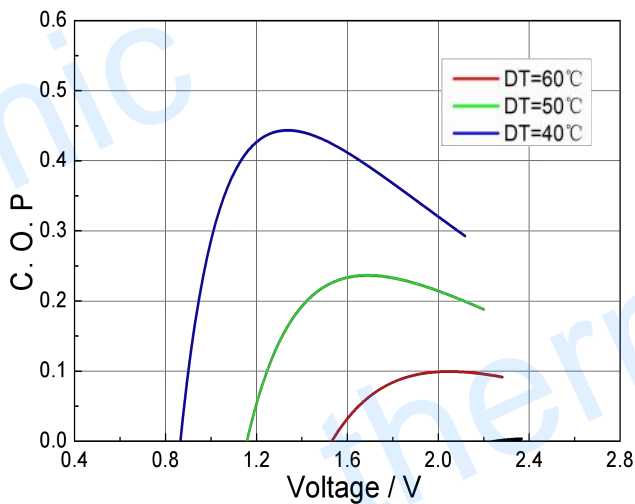

Standard Performance Graph COP = f(V) of DT ranged from 40 to 60/70 °C

Remark: The coefficient of performance (COP) is the cooling power Q_c /Input power ($V \times I$).

Operation Caution

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating
- Operation below I_{max} or V_{max}
- Work under DC

Note: All specifications subject to change without notice.