

## Specification of Thermoelectric Module

### TETC1-12706L3CH4.6-T200-EPS-AC

#### Description

The 127 couples, 36 mm × 36 mm size single module which is made of our high performance ingot to achieve superior cooling performance and 74°C or larger delta Tmax, is designed for superior cooling and heating applications. All the dices and metallic parts are coated with a layer of thin film for anti-corrosion and oxidation in high temperature that ensure the module can work in high temperature for long life. The module is able to run million thermal cycles in 70 °C temperature change range with less 3% degrading. Beyond the standard below, we can design and manufacture the custom made module according to your special requirements.

#### Features

- High effective cooling and efficiency.
- No moving parts, no noise, and solid-state
- Compact structure, small in size, light in weight
- Environmental friendly, RoHS compliant
- Precise temperature control
- Exceptionally reliable in quality, high performance


#### Application

- Food and beverage service refrigerator
- Portable cooler box for cars
- Temperature stabilizer
- Liquid cooling
- CPU cooler and scientific instrument
- Photonic and medical systems

#### Performance Specification Sheet

Th( °C)	27	50	Hot side temperature at environment: dry air, N <sub>2</sub>
DT <sub>max</sub> ( °C)	74	83	Temperature Difference between cold and hot side of the module when cooling capacity is zero at cold side
U <sub>max</sub> (Voltage)	16.8	18.08	Voltage applied to the module at DT <sub>max</sub>
I <sub>max</sub> (amps)	6.3	6.3	DC current through the modules at DT <sub>max</sub>
Q <sub>Cmax</sub> (Watts)	66	73.6	Cooling capacity at cold side of the module under DT=0 °C
AC resistance(ohms)	2.05	2.25	The module resistance is tested under AC
Tolerance (%)	±10		For thermal and electricity parameters

#### Geometric Characteristics Dimensions in millimeters

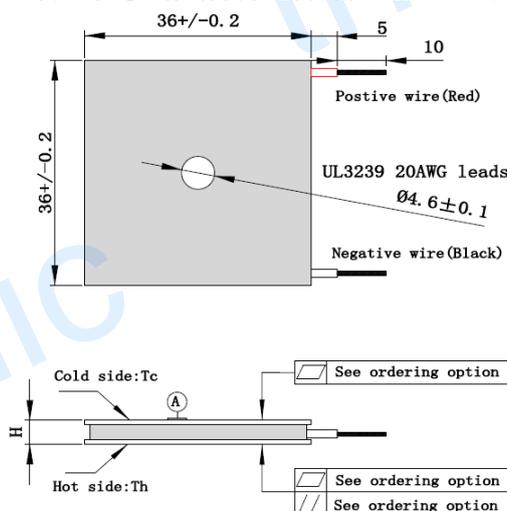

#### Manufacturing Options

##### A. Solder:

T200: CuSn (M.P.= 227 °C)

##### B. Sealant:

EPS: Epoxy sealing

##### C. Ceramics:

Alumina (Al<sub>2</sub>O<sub>3</sub>, white 96%)

##### D. Ceramics Surface Options:

Blank ceramics (not metalized)

##### E. Pellet Surface Options:

AC: Anti-oxidation Coating

#### Flatness/ Parallelism Option

Suffix	Thickness (mm)	Flatness/ Parallelism (mm)	Lead wire length(mm) Standard/Optional length
TF	0:3.9±0.1	0:0.05/0.05	15 ±1/Specify

Creative technology with fine manufacturing processes provides you the reliable and quality products

Tel: +86-791-88198288 Fax: +86-791-88198308 Email: [sales@thermonamic.com.cn](mailto:sales@thermonamic.com.cn) Web Site: [www.thermonamic.com.cn](http://www.thermonamic.com.cn)


### Operation Cautions

- Attach the cold side of module to the object to be cooled
- Attach the hot side of module to a heat radiator for heat dissipating


- Operation below  $I_{max}$  or  $V_{max}$
- Work under DC

### Performance Curve



Performance Curves at  $T_h=27\text{ }^\circ\text{C}$

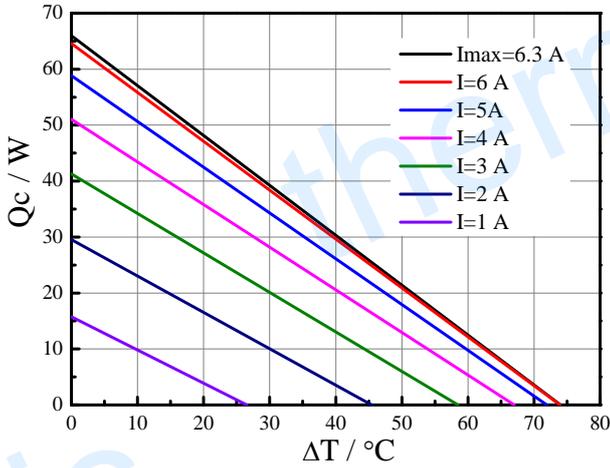



Performance Curves at  $T_h=50\text{ }^\circ\text{C}$

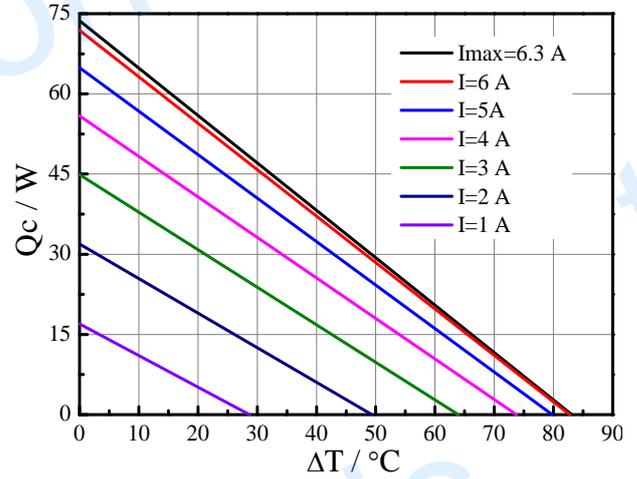

Standard Performance Graph  $Q_c = f(\Delta T)$

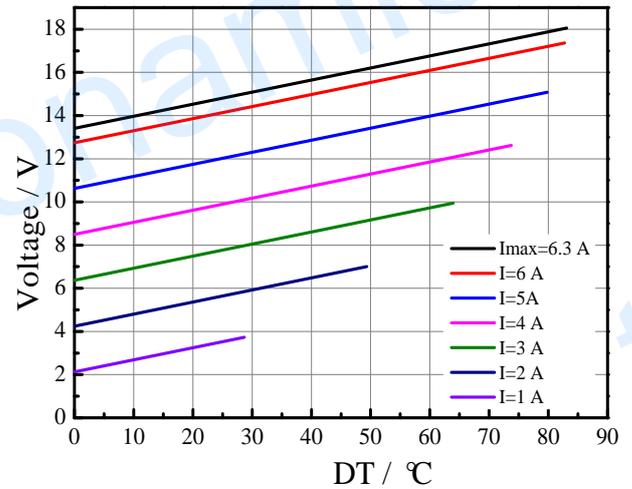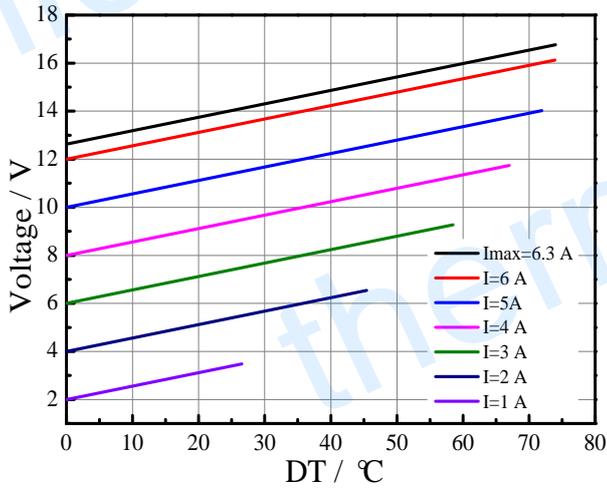


Standard Performance Graph  $V = f(\Delta T)$

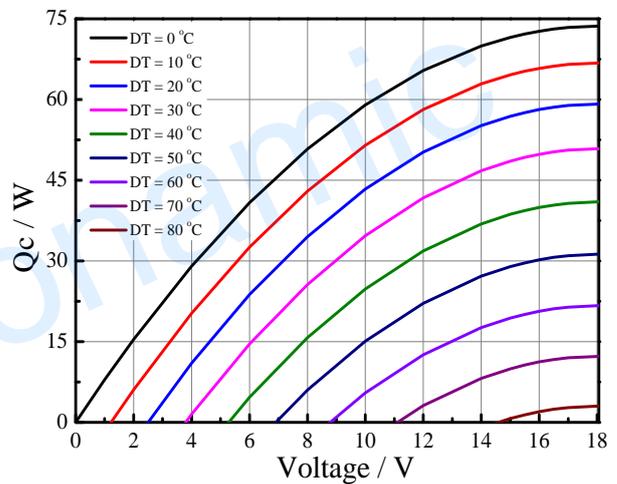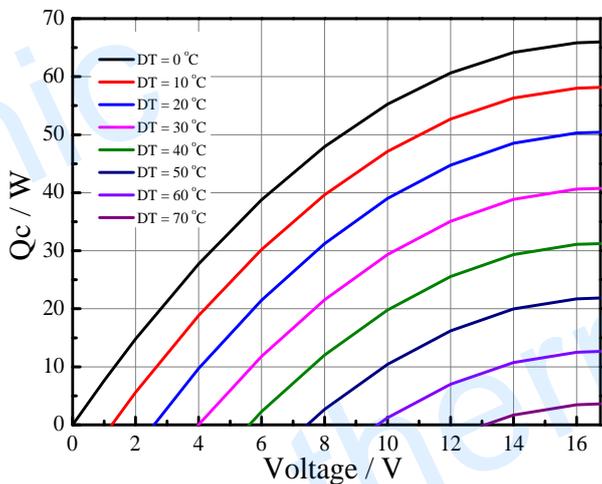


Standard Performance Graph  $Q_c = f(V)$

Creative technology with fine manufacturing processes provides you the reliable and quality products



Performance Curves at  $T_h = 27\text{ }^\circ\text{C}$

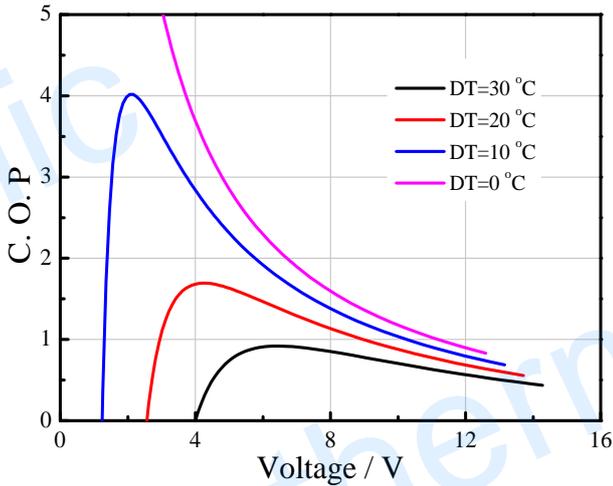

Performance Curves at  $T_h = 50\text{ }^\circ\text{C}$

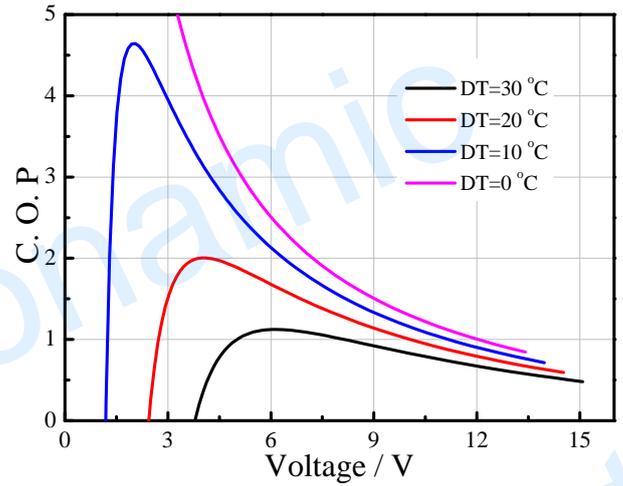

Standard Performance Graph COP = f(V) of  $\Delta T$  ranged from 0 to 30 °C

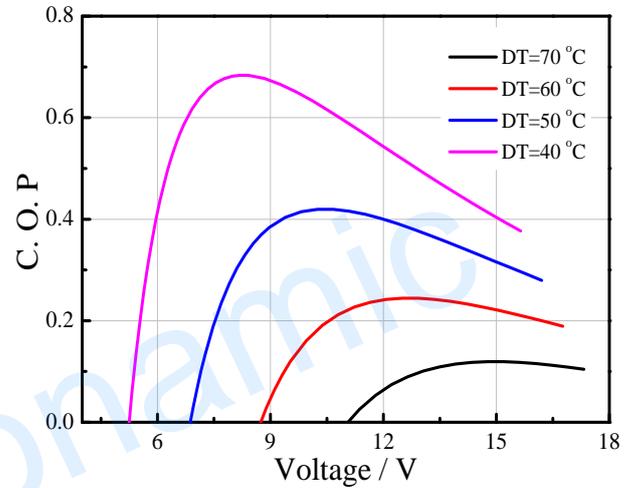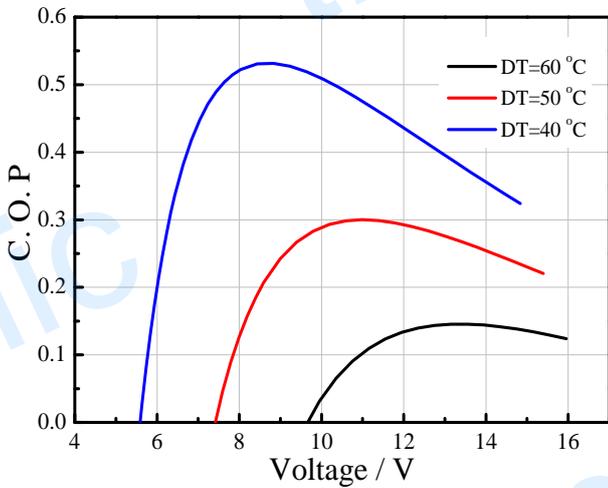


Standard Performance Graph COP = f(V) of  $\Delta T$  ranged from 40 to 60/70 °C


**Remark:** The coefficient of performance (COP) is the cooling power  $Q_c$ /Input power ( $V \times I$ ).

A typical 127 couples module is fabricated by the unique “soft” process and has demonstrated that it only has 2.5% degrading after 300,000 thermal cycling. The below graphic shows that in beginning 120,000 cycles, it degrade about 2.5%, and then go on stable with very tiny degrading in further 180,000 thermal cycles. It is derived out that the modules can go over million thermal cycles.

TEC Thermal Cycle Lifetime Test

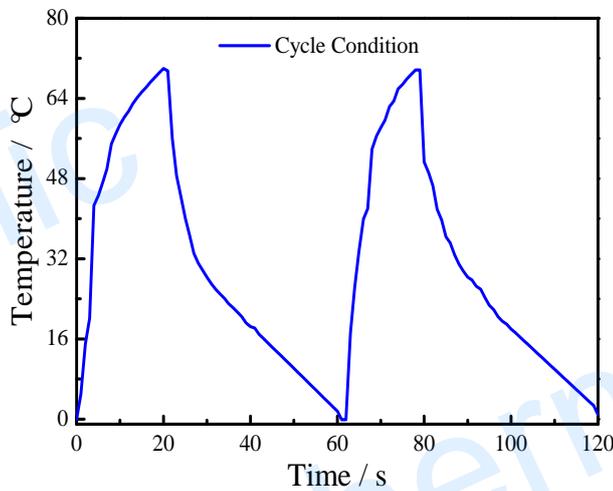

Typical cooling-heating cycle

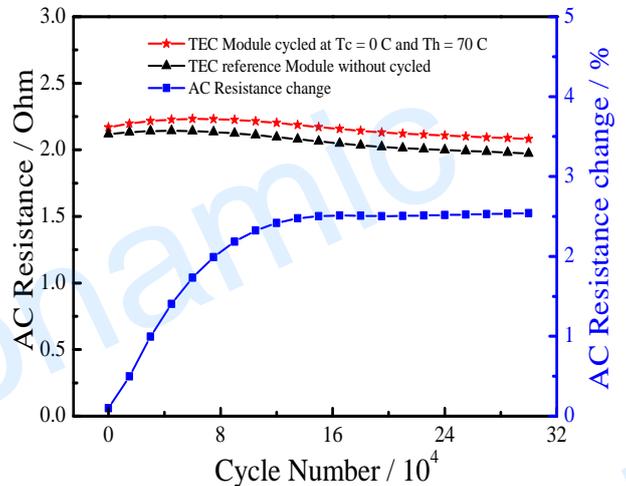

The Chart for AC Resistance and AC Resistance Changes vs. Cycle Number